

Distributed by:


JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242



The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 222658 (205206-1)

LOC	D15T	P	F	REVISIONS				
				ZONE	LTR	DESCRIPTION	DATE	APPD
GP	00				E3	REV. & REDRAWN ECN-1119	7-18-85	SW
					F	REVISED PER ECN BD6802	12/03/92	RM
					F1	ADDED -6 PER NPR 4837	06/14/93	SB
					G	OBS -7 PER EC 0420-143-96	29 OCT 97	SB
					H	REV PER EC OUE0-0002-01	09 JAN 02	JR

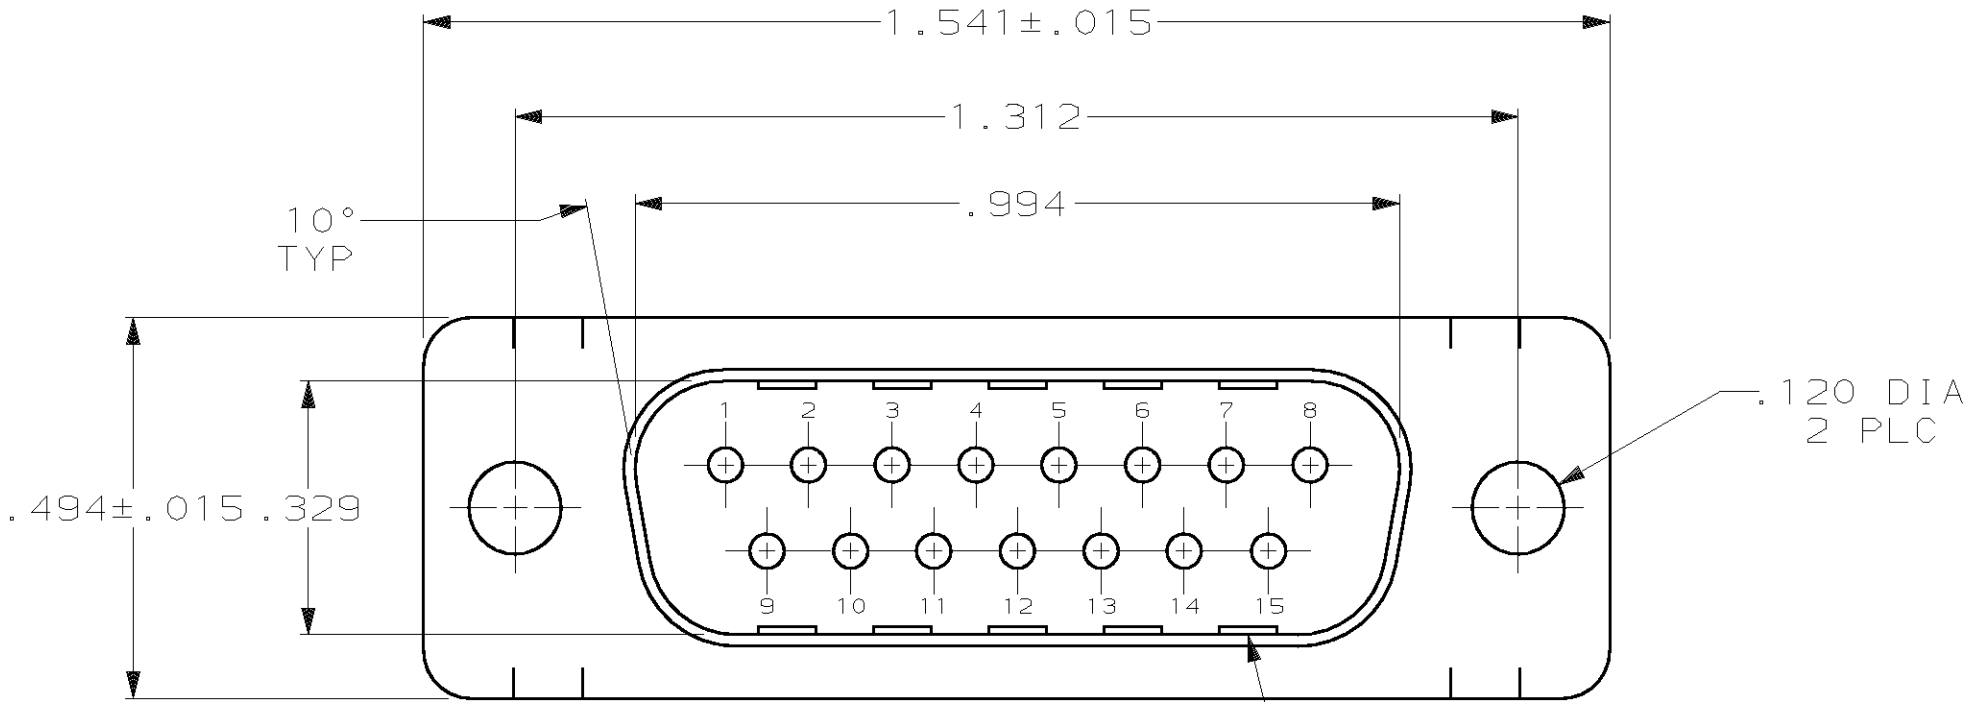

- CONNECTOR ACCEPTS SIZE 20 DF PIN CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
- CONNECTOR COMPLIES WITH 108-40005 WHERE APPLICABLE.
- NYLON, FLAME RETARDANT, 94V-0 RATED, GLASS FILLED, BLACK.
- STEEL PER ASTM A109.
- ZINC PLATED PER ASTM B633; TYPE II; CLASS SC1; YELLOW CHROMATE.
- TIN OR TIN-LEAD PLATED PER MIL-T-10727.
- TIN PLATED PER MIL-T-10727 OVER COPPER PER MIL-C-14550.

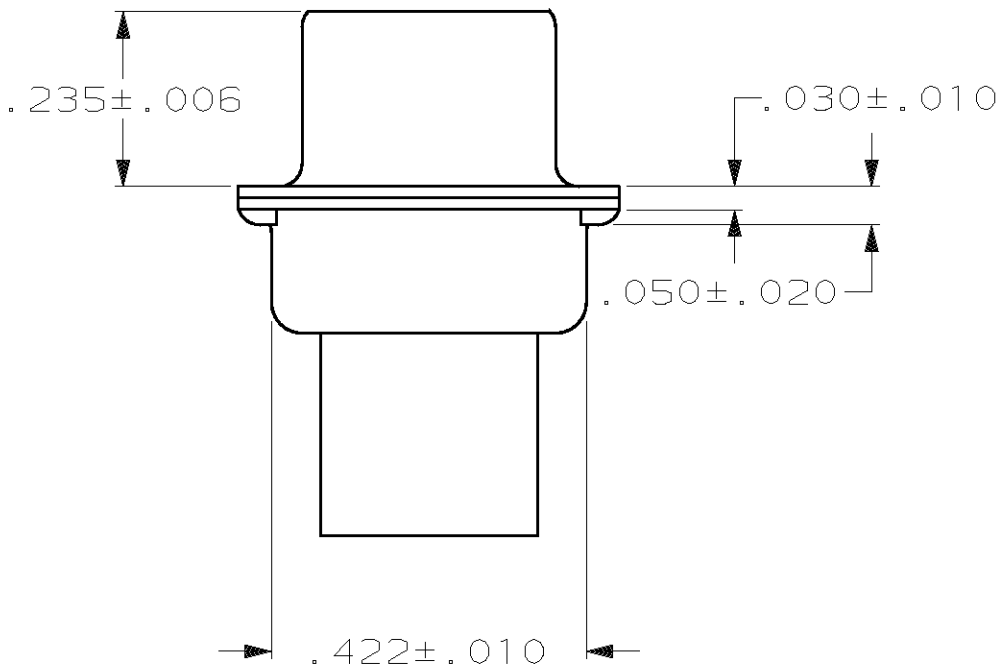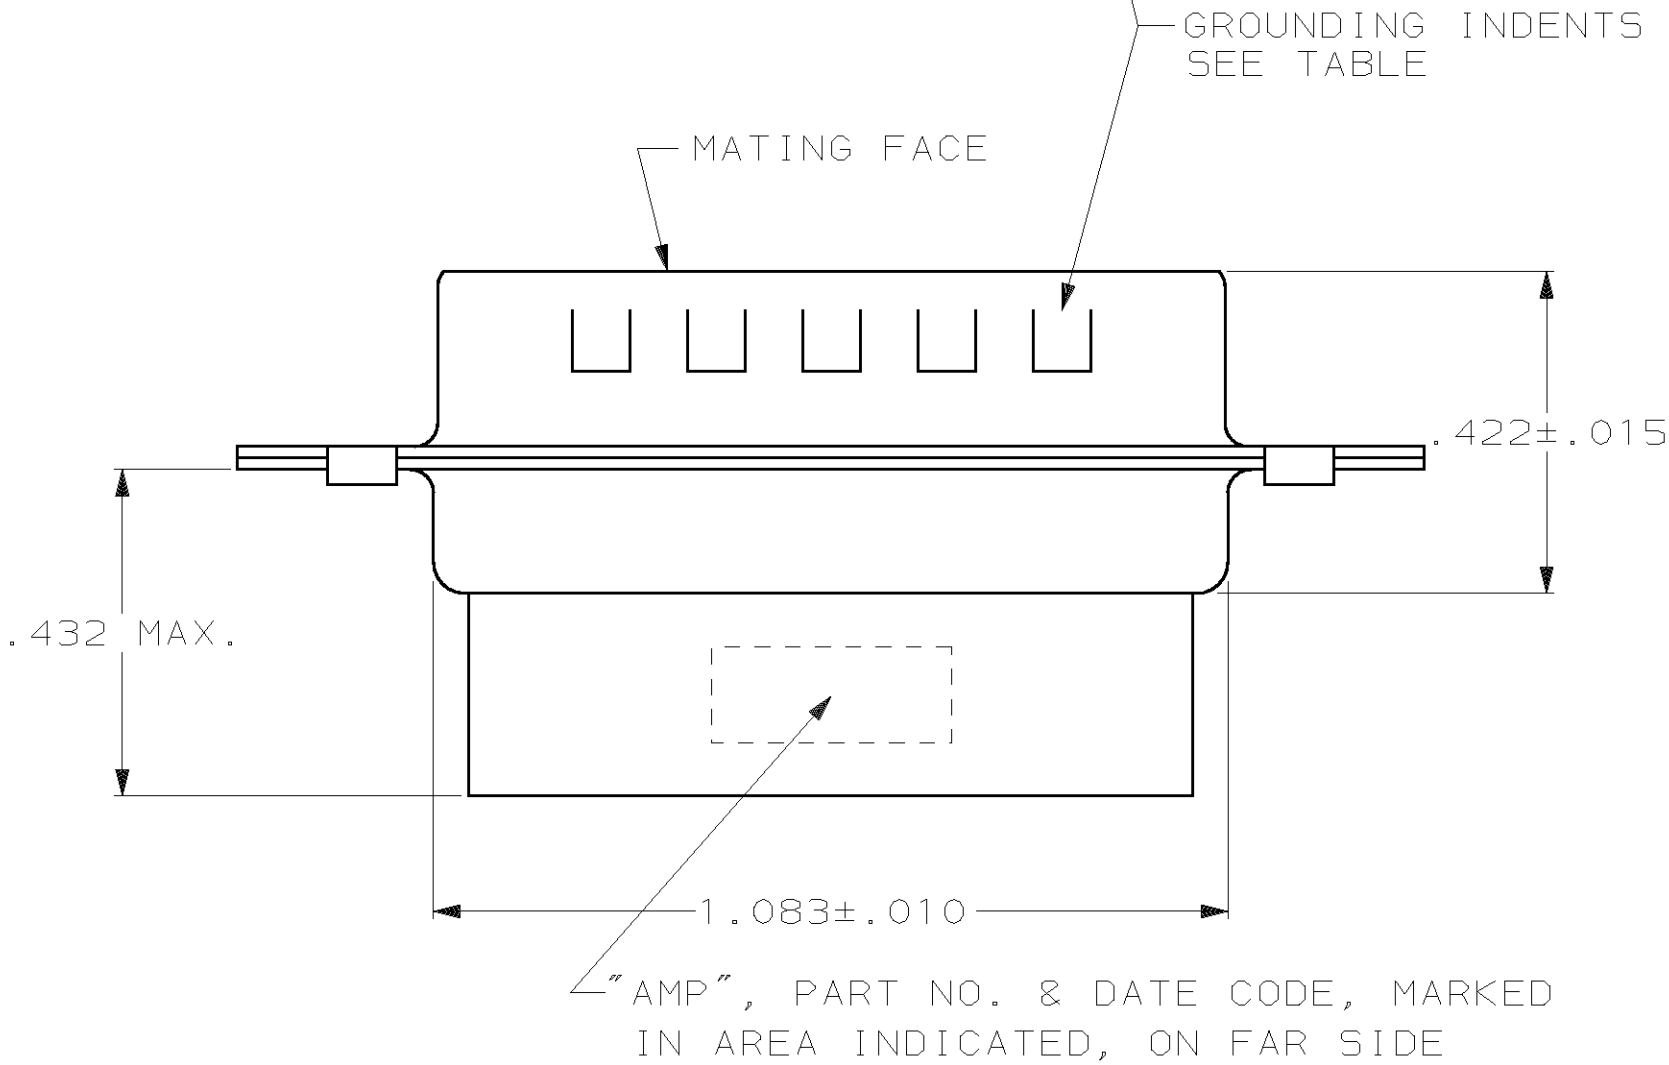

OBSOLETE	SMALL PACK	5	NO	205206-6
	STANDARD	7	YES	205206-3
	STANDARD	6	NO	205206-2
	STANDARD	5	NO	205206-1

PACKAGING TYPE		SHELL FINISH	GROUNDING INDENTS	PART NO
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± .005 ANGLES ± 2°		AMP Incorporated Harrisburg, PA 17105-3608		
MATERIAL MOLDED PARTS: 3 SHELLS: 4		NAME PLUG CONNECTOR, SIZE 2, 15 POSITION, AMPLIMITE™ HDP		
FINISH SHELLS: SEE TABLE		SIZE C	CAGE CODE 00779	DRAWING NO C-205206
		WEIGHT -	SCALE NTS	SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.